SEAM THICKNESS GAUGE




Seam thickness gauge (Digital)" is used to measure the Seam thickness of cans. With measure angle compensation. The center measure point can be adjusted. Cans can be auto - positioned in the center easily during measuring. With the Mitutoyo 0.01mm Resolution Digital Indicator.
Reliable design, invariableness measuring pressure and measuring angle which enable the inexperienced operators can also perform the measurement accurately.
Auto aligning the center of can body, applicable for different types of cans.

COUNTERSINK DEEP GAUGE



Countersink Gauge (digital)" is a Digital gauges for measuring Countersink depth parameters (the depth of beader of can). With the Mitutoyo 0.01mm Resolution Digital Indicator. The gauges can be connected to a computer or SPC system via the adapter and cable, so that to avoid the manual recording and personal error. The gauge can also combine with Seam Monitors and import the measurement data into computer

SEAM LENGHT GAUGE

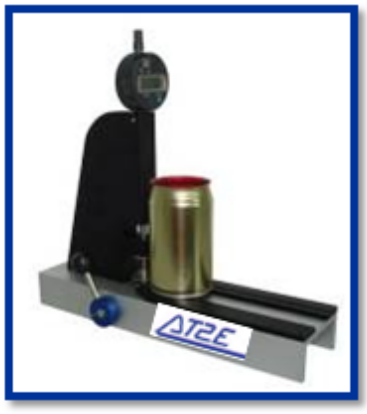

Seam length gauge is used to measure the Seam length (Seam height)
Reliable design, invariableness measuring pressure and measuring angle which enable the inexperienced operators can also perform the measurement accurately. The can body was aligned vertically, measurement results are more reliable. Applicable for different types of cans.

FLANGE WIDTH GAUGE



Flange Width Gauges is used to measure the flange width of empty cans.
Reliable design, invariableness measuring pressure and measuring angle which enable the inexperienced operators can also perform the measurement accurately. Auto aligning the center of can body, applicable for different types of cans.

The gauges can be connected to a computer or SPC system via the adapter and cable, so that to avoid the manual recording and personal error.

Technical specifications :

Measuring range	: 0-4mm
Résolution	: 0.01mm