TMV5 – TOUCH SCREEN ELECTRONIC TORQUETESTER

Our Torquemeters are designed with a special mechanical system for measuring torque which cancels most non- coaxial and top load influences on the measurement. These features cancel most operator induced influences on the measurement for maximum repeatability





Rear Face

Technical data

- Touch screen display
- Measures opening and closing directions
- 0.080 to 4.000 Kgf.cm in high accuracy mode
- Measuring range : 00.00 to 99.00 Kgf.cm
- 3 measuring modes (mean, peak, peak+infos)
- Units : Kgf.cm / Inch.lbs / daN.cm / N.m / N.cm
- Accuracy : ± 0,2 % of full scale
- 30 product memory with 4 limits each
- 4 thresholds by product (V Low, Low, High, v High)
- 15 operator memory
- Setting of files by administrator code
- Store and transfer up to 1000 measurements
- Message + bar-graf f(x) of torque value
- Dynamic display: statistics, hour, date
- Display : product name, operator, batch N°, line N°
- 2 RS USB output (PC – printer)
- Language : French, Italian, Spanish, English, German
- Delivered with COFRAC calibration certificate


- 110 / 230 V - 50/60 Hz




cosmetic chucks 1




cosmetic chucks 2

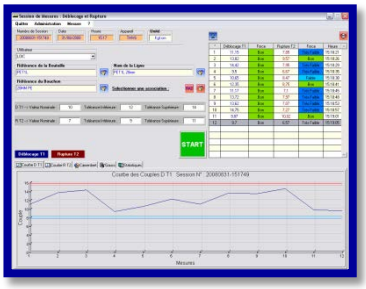

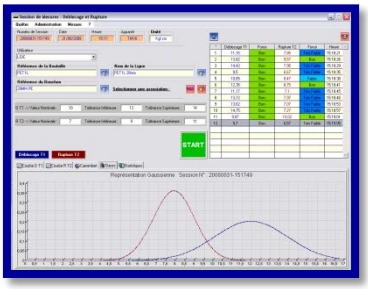

QUALITORQ software

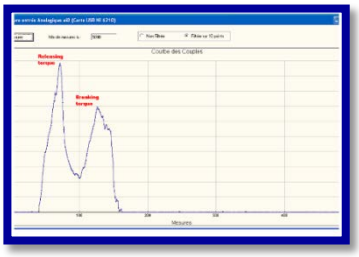

ANALOG CURVE Software

Mechanical data

- Stainless steel frame / IP 64
- Choice of measuring table : Food/Cosmetic /Pharma
- Optional battery
- Dimensions : Lxlxh
- Weight : 7 kg

Options

- Mini printer
- Printing of results & statistics (hour+date)
- QUALITORQ Software
- Analog curve 10 000 pts / sec Software
- Analog output
- Customizable display
- PLC integration on request
- Easy / Safe opening bloc
- Pack Verif calibration
- Transport case



Thermic or matricial printer



Opening Bloc

TMV6 – TOUCH SCREEN ELECTRONIC TORQUETESTER

Our Torquemeters are designed with a special mechanical system for measuring torque which cancel most non- coaxial and top load influences on the measurement..These features cancel most operator induced influences on the measurement for maximum repeatability

.

Technical data

- Touch screen display
- Measures opening and closing directions
- Measuring range : 00.00 to 49.00 Kgf.cm
- 2 measuring modes (mean, peak+info)
- Units : Kgf.cm / Inch.lbs / daN.cm / N.m / N.cm
- Accuracy : ± 0,2 % of full scale
- 1 product memory with 2 limits each
- 2 thresholds by products (Low, High)
- Setting of Files by administrator code
- Store and transfer up to 200 measurements
- Message + bar-graf f(x) of torque value
- Dynamic display : statistics, hour, date
- Language : French, Italian, Spanish, English, German
- Delivered with COFRAC calibration certificate

- 110 / 230 V - 50/60 Hz

Mechanical data

- Stainless steel frame / IP 64
- Choice of measuring table : Food/Cosmetic /Pharma
- Optional battery
- Dimensions : Lxlxh
- Weight : 7 kg

Options

- 2 RS USB output (PC – printer)
- Mini printer
- Printing of results & statistics (hour+date)
- QUALITORQ Software
- Analog curve 10 000 pts / sec Software
- Analog output
- Customizable display
- PLC integration on request
- Easy / Safe opening bloc
- Pack Verif calibration
- Transport case






Front Face


Rear Face


Cosmetic Chucks 1


Cosmetic Chucks 2

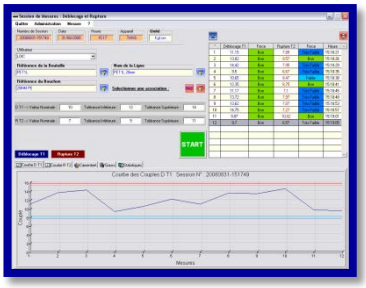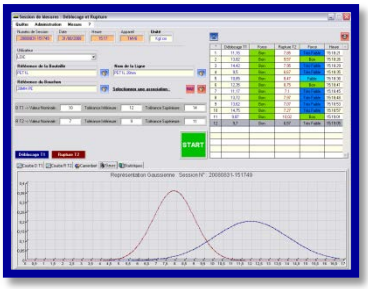

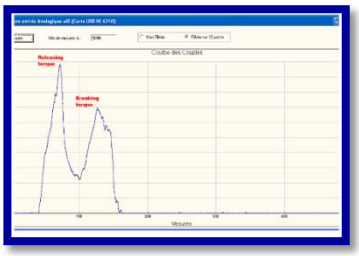QUALITORQ Software


ANALOG CURVE Software


Thermical or matricial printer


Opening Bloc